

FLS M9.07

DUAL-PARAMETER CONDUCTIVITY AND FLOW MONITOR & TRANSMITTER



The new FLS M9.07 is a dual monitor and transmitter which combines conductivity and flow measurements. A 4" wide full graphic display shows measured values clearly together with many other useful information. Moreover, due to a multicolor display plus a powerful backlight, measurement status can be determined easily from afar also. A tutorial software guarantees a mistake-proof and fast set up of every parameters. Different type of calibrations can be performed to fit user needs for both measurements. A 4-20mA output dedicated to each measurement grants to remote values to a external device. A proper combination of digital outputs allows customized setups for any process to be controlled. The USB port on the rear part allows the upgrade of software offering a wide range of customization services both standard and on request.

APPLICATIONS

- Water treatment and regeneration
- Industrial waste water treatment and recovery
- Softener process
- Filtration systems
- Desalination process
- Demineralized water production
- Reverse osmosis process
- Cooling water monitoring
- Processing and manufacturing industry
- Chemical production

MAIN FEATURES

- Wide full graphic display
- Multicolor backlight
- Help on board
- Simultaneous measurement of conductivity, temperature and flow
- Fast, intuitive and mistake-proof calibration software
- Mechanical relay for external device control
- Solid State Relays for programmable alarms
- Multilanguage menus
- USB port for software upgrading



TECHNICAL DATA

General

- Associated sensors: FLS conductivity/temperature sensors & FLS hall effect flow sensors with frequency output or FLS F6.60 Flow sensor magmeters
- Materials:
 - case: ABS
 - display window: PC
 - panel & wall gasket: silicone rubber
 - keypad: 5-button silicone rubber
- Display:
 - LC full graphic disply
 - backlight version: 3-colours
 - backlight activation: User adjustable with 5 levels of timing
 - update rate: 1 second
- enclosure: IP65 front
- Conductivity input range: $0,055 \div 200000 \mu\text{S}/\text{cm}$ (according to the cell constant applied)
- Conductivity measurement accuracy: $\pm 2.0 \%$ of reading value
- Temperature input range: $-50 \div 150^\circ\text{C}$ ($-58 \div 302^\circ\text{F}$) (with Pt100-Pt1000)
- Temperature measurement resolution: $0,1^\circ\text{C}/^\circ\text{F}$ (Pt1000); $0,5^\circ\text{C}/^\circ\text{F}$ (Pt100)
- Flow input range (frequency): $0 \div 1500\text{Hz}$
- Flow input accuracy (frequency): $0,5\%$

Electrical

- Supply Voltage: 12 to 24 VDC $\pm 10\%$ regulated
- Max Power Consumption: $<300\text{mA}$
- FLS hall effect flow Sensor power:
 - 5 VDC @ $< 20 \text{mA}$
 - optically isolated from current loop
 - short circuit protected
- 2*Current output:
 - 4-20 mA, isolated, fully adjustable and reversible

- max loop impedance: 800Ω @ 24 VDC - 250Ω @ 12 VDC
- 2*Solid State Relay output:
 - (Flow) user selectable as MIN alarm, MAX alarm, Pulse Out, Window alarm, Off
 - (Conductivity) user selectable as ON-OFF, Proportional frequency output, Timed Pulse, Off
 - optically isolated, 50 mA MAX sink, 24 VDC MAX pull-up voltage
 - max pulse/min: 300
 - hysteresis: user selectable
- 2*Relay output:
 - (Flow) user selectable as MIN alarm, MAX alarm, Pulse Out, Window alarm, Off
 - (Conductivity) user selectable as ON-OFF, Proportional frequency output, Timed Pulse, Off
 - mechanical SPDT contact
 - expected mechanical life (min. operations): 10^7
 - expected electrical life (min. operations): $10^5 \text{N.O.}/\text{N.C.}$ switching capacity 5A/240VAC
 - max pulse/min: 60
 - hysteresis: user selectable

Environmental


- Operating temperature: -10 to $+70^\circ\text{C}$ ($+14$ to $+158^\circ\text{F}$)
- Storage temperature: -30 to $+80^\circ\text{C}$ (-22 to $+176^\circ\text{F}$)
- Relative humidity: 0 to 95% not condensing

Standards & Approvals

- Manufactured under ISO 9001
- Manufactured under ISO 14001
- CE
- RoHS Compliant
- EAC

WIRING CONNECTIONS

Rear Terminal View

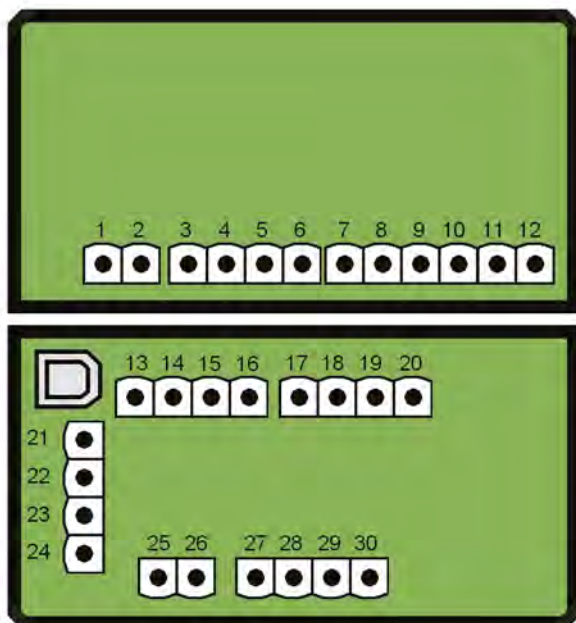

1	-VDC	Power Supply
2	+VDC	
3	NO	SSR1
4	COM	
5	NO	SSR2
6	COM	
7	NO	RELAY1
8	COM	
9	NC	RELAY2
10	NO	
11	COM	
12	NC	
13	+V	Flow Sensor
14	FREQ IN	
15	DIR	
16	GND	
17	+HOLD	Digital Input
18	-HOLD	
19	+REED	
20	-REED	
21	-LOOP2	Analog Output
22	+LOOP2	
23	-LOOP1	
24	+LOOP1	
25	+IN	Conductivity Sensor
26	REF	
27		PT100 - PT1000
28		
29		
30		

ORDERING DATA

M9.07 Conductivity and Flow Monitor and Transmitter						
Part No.	Description /Name	Power supply	Wire power Technology	Sensor Input	Output	Weight (gr.)
M9.07.P1	Panel mount Conductivity & Flow monitor	12 - 24 VDC	3/4 wire	Conductivity, Temperature, Flow (Frequency)	2*(4-20mA), 2*(S.S.R.), 2*(mech. relay)	550
M9.07.W1	Wall mount Conductivity & Flow monitor	12 - 24 VDC	3/4 wire	Conductivity, Temperature, Flow (Frequency)	2*(4-20mA), 2*(S.S.R.), 2*(mech. relay)	650
M9.07.W2	Wall mount Conductivity & Flow monitor	110 - 230 VAC	3/4 wire	Conductivity, Temperature, Flow (Frequency)	2*(4-20mA), 2*(S.S.R.), 2*(mech. relay)	750